

Martin® Compact Cleaner




The [Martin® Compact Cleaner](#) from Martin Engineering uses a low-profile blade mounted on an internal square mainframe for effective belt cleaning in tight spaces. It is designed for applications on small pulleys and belts operating at speeds up to 350 fpm (1.8 m/sec).

BENEFITS

- Fits In Smallest Spaces**
 Fits in spaces with as little as 6.75 inches (171 mm) of clearance on pulleys as small as 7.00 inches (180 mm) in diameter.
- Curved Blade Sustains Performance**
 Blade incorporates patented Continuous Angle Radial Pressure (CARP) design to maintain effective cleaning across blade life.
- Simple Blade Service**
 To replace worn blade, slide new blade onto square tube mainframe.
- Choose Slits and/or Segments**
 Segments allow one-piece blade to accommodate crowned pulleys and variations in belt travel. Patented “wear slits” renew cleaning edge across blade life.
- Urethane Options Match Needs**
 Blades are available in high-performance urethane “colors” to match application requirements.

High-performance urethanes are available; see your Martin Engineering representative for assistance in specifying nonstandard products. Refer to Form No. L3375.

NOMENCLATURE

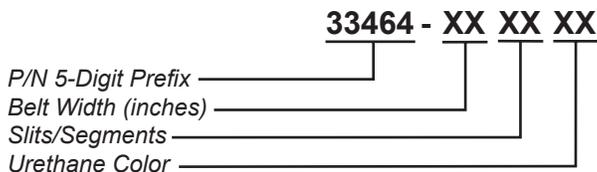

SLITS/SEGMENTS
11 for no slits or segments
01 for slits only
10 for segments only
00 for slits & segments

URETHANE COLOR
BR for Brown
GR for Green
NB for Navy Blue
CL for Tan
Blank for Orange


SPECIFICATIONS

Belt Cleaner	Max. Belt Speed fpm (m/sec)	Maximum Service Temp. °F (°C)	Min Pulley Diameter in. (mm)	Mounting Distance in. (mm)
Martin® Compact Cleaner	350 (106.7)	160 (71) Continuous 180 (82.2) Intermittent	6.0 (152.4)	1.75 (44.5)


TECHNICAL DATA SHEET

DIMENSIONS

Belt Width in. (mm)*	Mainframe Length in. (mm) A	Blade Coverage in. (mm) B	Shipping Weight lb (kg)	Assembly P/N
12 (305)	28 (711)	10 (254)	12 (5.44)	33464-12XXXX
14 (356)	30 (762)	12 (305)	14 (6.35)	33464-14XXXX
16 (406)	31 (787)	14 (356)	15 (6.80)	33464-16XXXX
18 (457)	32 (813)	16 (406)	16 (7.26)	33464-18XXXX
24 (610)	40 (1016)	22 (559)	25 (11.34)	33464-24XXXX
30 (762)	44 (1118)	28 (711)	27 (12.25)	33464-30XXXX
36 (914)	52 (1321)	34 (864)	30 (13.61)	33464-36XXXX
42 (1067)	56 (1422)	40 (1016)	33 (14.97)	33464-42XXXX
45 (1143)	60 (1524)	43 (1092)	33 (14.97)	33464-45XXXX
48 (1219)	64 (1626)	46 (1168)	33 (14.97)	33464-48XXXX

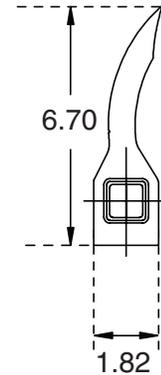

*Metric measurements represent a conversion of belt width in inches rather than a standard metric belt size.

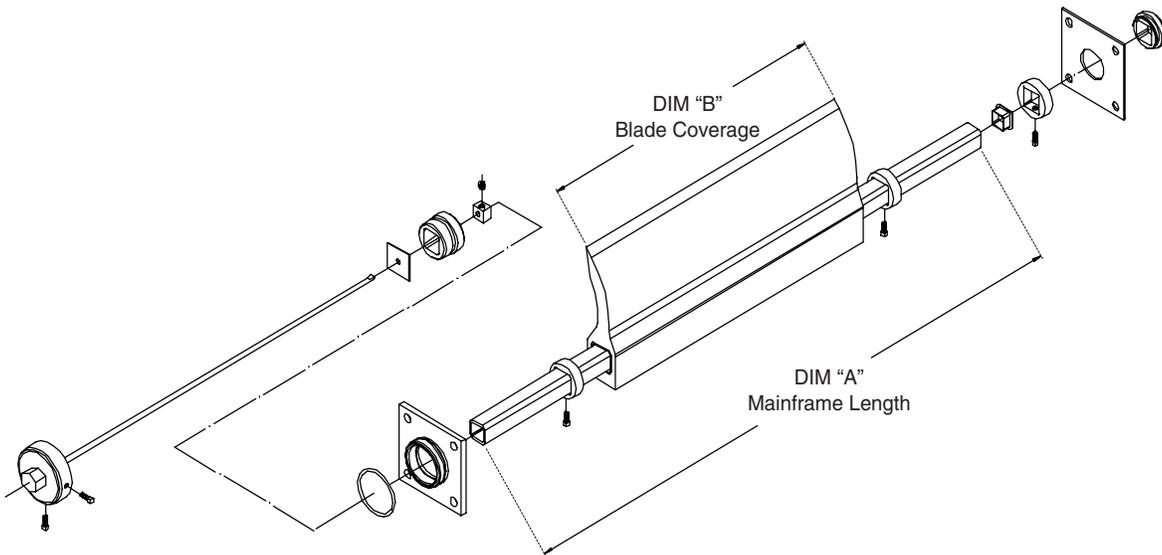

Belt Cleaner	Tensioner	Tensioner P/N	Replacement Blade P/N
Martin® Compact Cleaner	Martin® Internal Spring Tensioner	33036	33463-XXXXXX



Martin Engineering USA
 One Martin Place
 Neponset, IL 61345-9766 USA
 800 544 2947 or 309 852 2384
 Fax 800 814 1553
www.martin-eng.com

**COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV
 = ISO 9001:2008 =**

Problem Solved™ GUARANTEED!

Form No. L3667-08/12
 © Martin Engineering Company 2002, 2012